

BCT950 交流/直流電源用避雷器系列

BCT950 Alternate/Direct Current Surge-Protector Series

專用於各電力設備、自來水廠，太陽能光電交直流電力系統防護~

OILFIELD ARRESTORS 交流 LA603AC

Rapid Response, High Current Delta Arrestors™ For Industrial Use Help Prevent Voltage Surge And Lightning Damage To Motose And Control Equipment.

Type of design	Silicon Oxide Varistor
Maximum current	100,000 amps
Maximum energy	3000 joules
Maximum number of surges	Unlimited
Response time one milliamp test	5 nanoseconds
Response time to clamp 10,000 amps	10 nanoseconds
Response time to clamp 50,000 amps	25 nanoseconds
Leak current at double the rated voltage	None
Leads	36" # 12 THHN
Case material	PVC
Locknut and Washer furnished	



CASE DIMENSIONS : 4 1/2" High
2 1/4" Diameter

DIRECT CURRENT ARRESTOR 直流 LA602DC


Silicon Oxide Arrestor For Photovoltaic And Other Limited Current DC Applications

Type of design	Silicon Oxide Varistor
Maximum current	600,000 amps
Maximum energy	2000 joules per line
Maximum number of surges	Unlimited
Response time one milliamp test	5 nanoseconds
Response time to clamp 10,000 amps	10 nanoseconds
Response time to clamp 50,000 amps	25 nanoseconds
Leak current at double the rated voltage	None
Leads	3 18" # 12 THHN
Case material	PVC
Locknut and Washer furnished	



Weatherproof Enclosure
Dimensions : 2 1/4" High
2 1/4" Diameter

接線圖 Connect Diagram

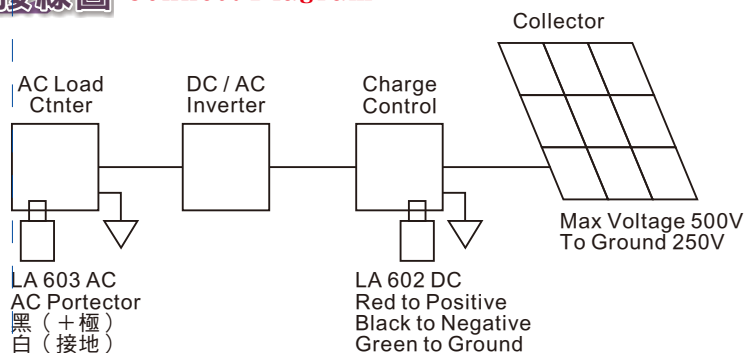

台南市環保局突波吸收器裝設工程

訂購型號 Ordering Information

BCT950 LA - 代碼1 - 代碼2 - 代碼3

輸入種類	603AC	A	電壓範圍	AC440~660V	1	系統接線	3 φ 3W 3 φ 4W	1
	602DC	D		DC0~600V	2		二線式	2

Conduction Characteristics

耐突波電壓	LA602DC	240V	480V	840V	1300V	2000V		
	LA603	450V	920V	1040V	1500V	2300V	4000V	5000V
釋放電流	DC	5KA	10KA	20KA	40KA	60KA		
	AC	5KA	10KA	20KA	40KA	60KA	80KA	100KA
		Unlimited Number of Operations					One Operation	